



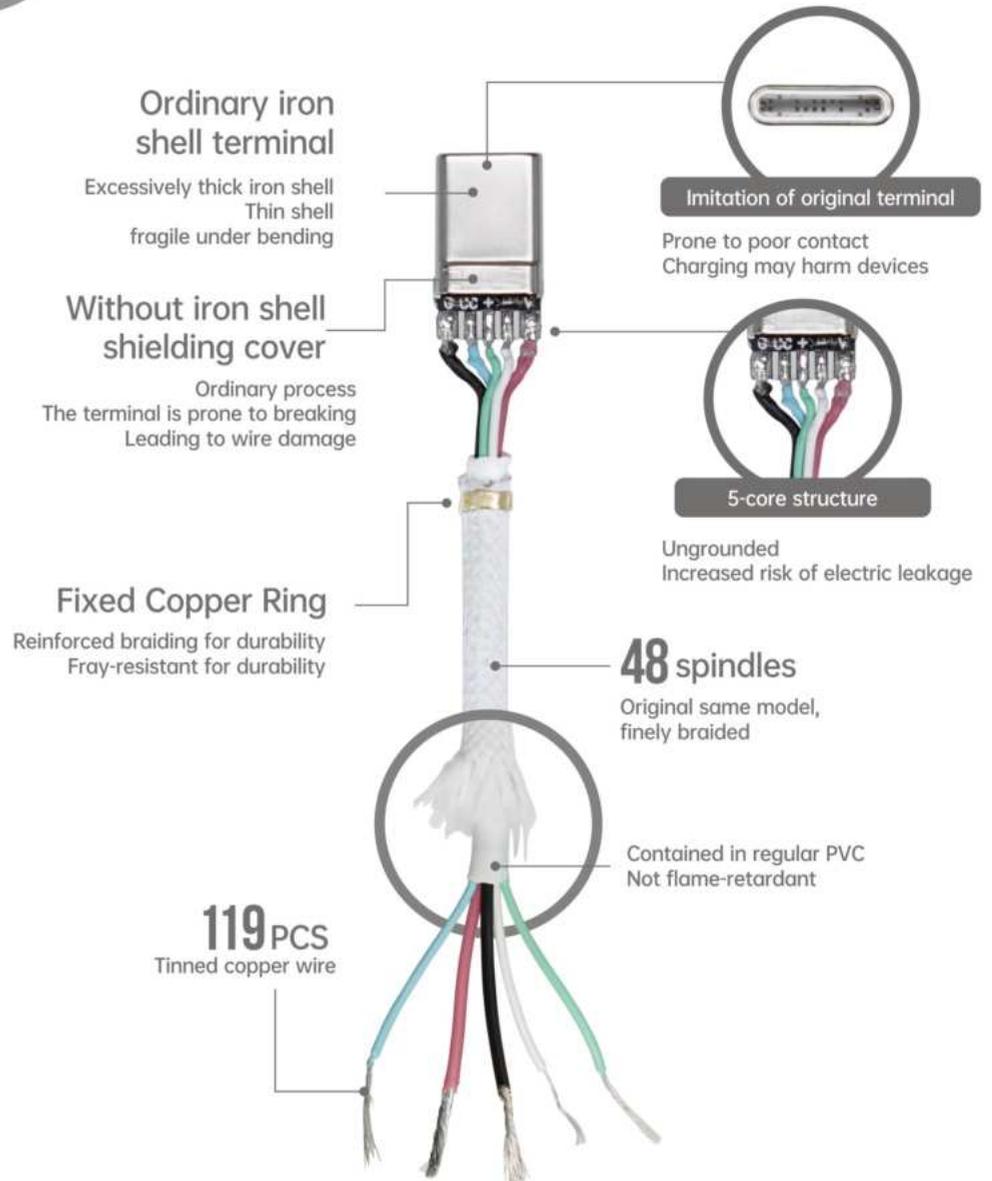

RSILOU original connector fast charging cable

VS

Common iPhone fast charging cable on the market

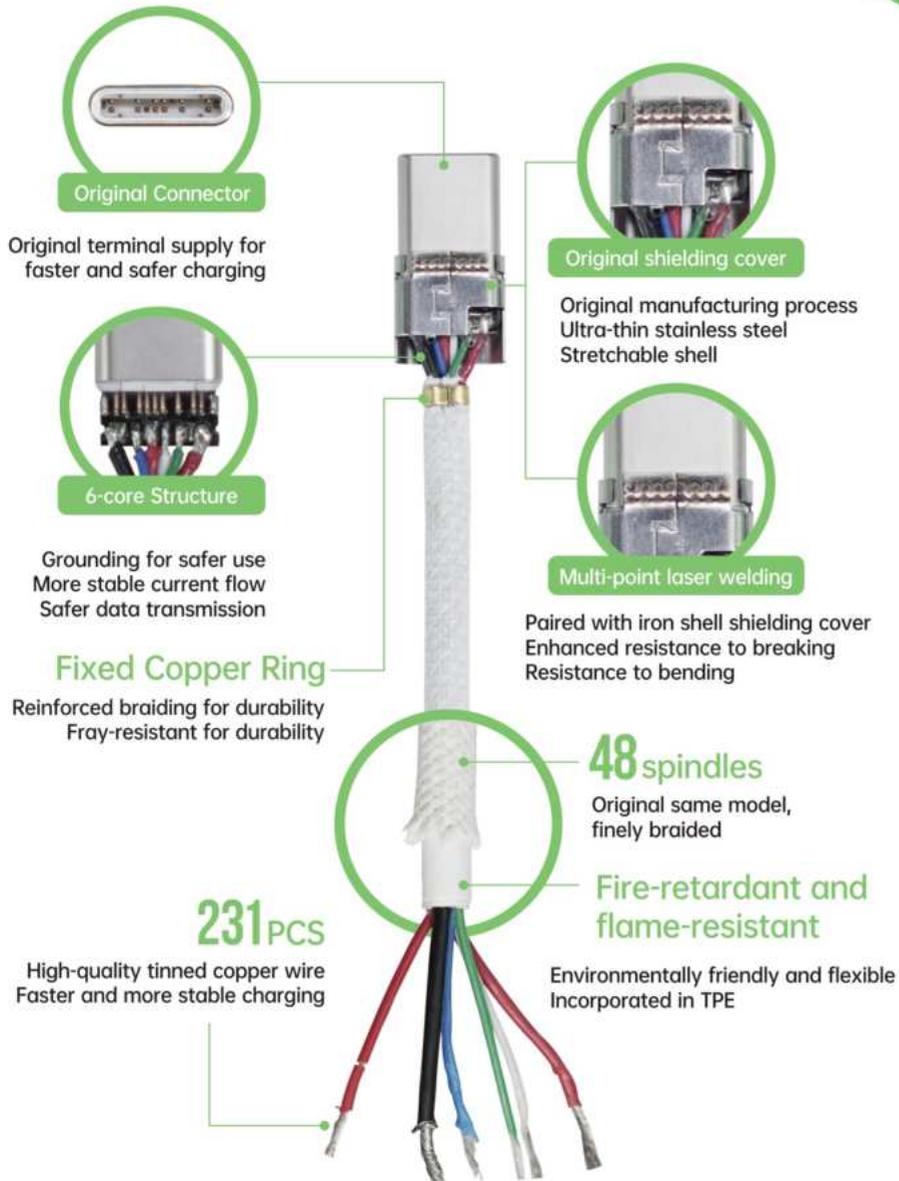

RSILOU Charger

VS

Common charger on the market

Pure copper pins
Rust-resistant, stable contact, and no sparking

Flame-retardant shell
High-purity flame-retardant plastic
More durable and safer

Betterfuse
Time Delay Fuse
Prevent accidents from happening
Reduce safety risks

FR4 Two-layer resin Flame-resistant Circuit Board

Beryl Solid Capacitor
More stable output at high temperature resistance
Small ripple ensures mobile phone safety

AiShi High-voltage Capacitor
2 high-voltage capacitors
Guarantee full-power output

Safety Capacitor x2
More quantity leads to higher safety

- ✓ Applying white silicone serves to fix components and assist in heat dissipation in electronic devices
- ✓ Charger with smart temp & current recognition, ensures safe fast charging for all phones

RSILOU 3C charger uses same suppliers as iPhone, Huawei, OV for components

Pure copper pins
Rust-resistant, stable contact, and no sparking

Flame-retardant shell
Different levels of purity
Varying flame retardancy effects

Common Resistor
Ordinary resistors lack safety guarantees in emergencies compared to time-delay fuses

Common high-voltage Capacitor

Safety Capacitor x1
Low quantity and low safety

Ordinary Electrolytic Capacitor

Single-layer circuit board
The low-cost single-sided fiber circuit board has low strength
It is prone to heat up and lacks fire safety certification

Fixed-current charger can damage phones by not adjusting to optimal charge **X**

No silicone, components loosen, poor heat dissipation **X**

RSILOU

VS

OTHER

Case
fire-resistant PC+ABS plastic material, safe& durable

PCBA
High quality circuit board+components from well-known manufacturers, high efficiency and good reliability

USB&TYPE-C
High quality USB socket, rust proof, 10000 times plug and unplug test

Temperature protection
All with temperature control components, ensuring a safer charging experience



Battery

Certified battery cell ensures your safety
Ternary lithium-ion battery, high capacity and long life

USB&TYPE-C
Ordinary USB interface, Easy to rust and Shorter life

Case
Ordinary plastic shell, easy to age, discolor, and catch fire

PCBA
Ordinary components have a high failure rate and higher temperature

X
Temperature protection
Without any protection, danger



Battery

Non certified battery, danger
Manganese battery, rapid attenuation and not durable

RSILOU

VS

OTHER



Speaker

Big size double-layer diaphragm drivers, Hi-Fi Sound Quality & Powerful Bass



Speaker

Smaller speaker driver



Battery

Iron shell button battery Ultra-Long Playtime, more safe, long life



Case battery

High quality lithium-ion batteries, more play time



Case battery

Ordinary battery, Support for a short usage time



Battery

Small Lithium Ion Battery, danger.



Plastic shell

Fire-resistant PC+ABS plastic material, safe & durable



Charging case controller

Multiple protection, Ensure your safety



Case battery

Ordinary battery, Support for a short usage time



Plastic shell

Ordinary plastic shell, easy to age, discolor, and catch fire



Charging case controller

Ordinary components have a high failure rate





POWER BANK

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES

10000 mAh

POWER BANK 



R1003

POWER BANK WITH LED DISPLAY

Battery Capacity: 10000mAh (37Wh)

TYPE-C Input: 5V=2A USB-A1 Output: 5V=2A USB-A2 Output: 5V=2A Total Output: 5V=2A

20000 mAh



R1004

POWER BANK WITH LED DISPLAY

Battery Capacity: 20000mAh (74Wh)

TYPE-C Input: 5V=2A USB-A1 Output: 5V=2A USB-A2 Output: 5V=2A Total Output: 5V=2A



10000 mAh

FAST CHARGING

MINI ULTRA-THIN POWER BANK WITH FAST CHARGING & LED DISPLAY

R1005

Battery Capacity: 10000mAh (38.5Wh) TYPE-C Input: 5V=3A 9V=2A 12V=1.5A
MICRO Input: 5V=2A 9V=2A 12V=1.5A LIGHTNING Input: 5V=2A 9V=2A 12V=1.5A
TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A USB-A Output: 5V=3A 5V=4.5A 9V=2A 12V=1.5A
Total Output: 5V=3A



20000 mAh

FAST CHARGING

**POWER BANK
WITH FAST CHARGING & LED DISPLAY**

R1009

Battery Capacity: 20000mAh (77Wh) TYPE-C Input: 5V=3A 9V=2A 12V=1.5A
 MICRO Input: 5V=2A 9V=2A 12V=1.5A LIGHTNING Input: 5V=2A 9V=2A 12V=1.5A
 TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A USB-A Output: 5V=3A 9V=2A 10V=2.25A 12V=1.5A
 Total Output: 5V=3A

30000 mAh

FAST CHARGING

**POWER BANK
WITH FAST CHARGING & LED DISPLAY**

R1010

Battery Capacity: 30000mAh (115.5Wh) TYPE-C Input: 5V=3A 9V=2A MICRO Input: 5V=2A 9V=2A
 LIGHTNING Input: 5V=2A 9V=2A TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A
 USB-A1/UAB-A2 Output: 5V=3A 9V=2A 10V=2.25A 12V=1.5A
 UAB-A3 Output: 4.5V=5A 5V=4.5A 9V=2A 12V=1.5A Total Output: 5V=3A



10000 mAh

FAST CHARGING

BUILT-IN CABLE

**BUILT-IN USB-C & LIGHTNING CABLE
FAST CHARGING LED DIGITAL DISPLAY POWER BANK**

R1012

Battery Capacity:10000mAh (37Wh) TYPE-C Input:5V≡3A 9V≡2A 12V≡1.5A
TYPE-C Output:5V≡3A 9V≡2.22A 12V≡1.67A LIGHTNING Cable Output:5V≡2.4A 9V≡2.22A
USB-A Output:5V≡2.4A TYPE-C Cable Output:5V≡3A 9V≡2A 10V≡2.25A 12V≡1.5A
Total Output:5V≡3A

20000 mAh

FAST CHARGING

BUILT-IN CABLE

**BUILT-IN USB-C & LIGHTNING CABLE
FAST CHARGING LED DIGITAL DISPLAY POWER BANK**

R1013

Battery Capacity:20000mAh (74Wh) TYPE-C Input:5V≡3A 9V≡2A 12V≡1.5A
TYPE-C Output:5V≡3A 9V≡2.22A 12V≡1.67A LIGHTNING Cable Output:5V≡2.4A 9V≡2.22A
USB-A Output:5V≡2.4A TYPE-C Cable Output:5V≡3A 9V≡2A 10V≡2.25A 12V≡1.5A
Total Output:5V≡3A

 POWER BANK



POWER BANK 



5000 mAh

MAGNETIC WIRELESS CHARGING



**CAMERA GRIP POWER BANK
WHIT MAGNETIC WIRELESS CHARGING**

R1015

Battery Capacity: 5000mAh(18.25Wh) TYPE-C Input: 5V=2.4A TYPE-C Output: 5V=2.4A
Wireless Charging: 5W Total Output: 5V=2.4A

 POWER BANK



10000 mAh

BUILT-IN CABLE

FAST CHARGING

MINI FAST CHARGING POWER BANK WITH INTEGRATED MULTI-FUNCTION CABLE **R1016**

Battery Capacity: 10000mAh (36.5Wh) TYPE-C Input: 5V≐2.6A 9V≐2A 12V≐1.5A
TYPE-C Output: 5V≐3A 9V≐2.22A 12V≐1.67A LIGHTNING Cable Input: 5V≐2.6A 9V≐2A 12V≐1.5A
LIGHTNING Cable Output: 5V≐2.4A 9V≐2.22A TYPE-C Cable Input: 5V≐2.6A 9V≐2A 12V≐1.5A
TYPE-C Cable Output: 5V≐2.4A 9V≐2.22A 12V≐1.67A Total Output: 5V≐3A

POWER BANK 



POWER BANK



30000 mAh

FAST CHARGING

FAST CHARGING POWER BANK WITH LED DIGITAL DISPLAY

R1017

Battery Capacity: 30000mAh (111Wh) TYPE-C Input: 5V=3A 9V=2A MICRO Input: 5V=2A 9V=2A
TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A USB-A1/USB-A2 Output: 5V=2.4
USB-A3 Output: 5V=3A 5V=4.5A 9V=2A 12V=1.5A Total Output: 5V=3A

10000 mAh

FAST CHARGING



R1018

POWER BANK WITH LED DISPLAY

Battery Capacity: 10000mAh (37Wh)
TYPE-C Input: 5V=3A 9V=2A 12V=1.5A TYPE-C Output: 5V=3A 9V=2.22A 10V=2.25A 12V=1.67A
USB-A1/USB-A2 Output: 5V=3A 5V=4.5A 9V=2A 12V=1.5A Total Output: 5V=3A

20000 mAh

FAST CHARGING



R1019

POWER BANK WITH LED DISPLAY

Battery Capacity: 20000mAh (74Wh)
TYPE-C Input: 5V=3A 9V=2A 12V=1.5A TYPE-C Output: 5V=3A 9V=2.22A 10V=2.25A 12V=1.67A
USB-A1/USB-A2 Output: 5V=3A 5V=4.5A 9V=2A 12V=1.5A Total Output: 5V=3A

 POWER BANK

POWER BANK 



10000 mAh

FAST CHARGING

MAGNETIC WIRELESS

**USB-C PORT WITH FAST CHARGING
MAGNETIC WIRELESS CHARGING POWER BANK**

R1020

Battery Capacity: 10000mAh (38.5Wh) TYPE-C Input: 5V=3A 9V=2A
TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A Wireless Charging: 5W/7.5W/10W/15W
Total Output: 5V=3A

BUILT-IN CABLE

FAST CHARGING

10000 mAh

R1021

**BUILT-IN USB-C & LIGHTNING CABLE
FAST CHARGING LED DIGITAL DISPLAY POWER BANK**

Battery Capacity: 10000mAh (38.5Wh) TYPE-C Input: 5V=3A 9V=2A 12V=1.5A
TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A LIGHTNING Cable Output: 5V=2.4A 9V=2.22A 12V=1.67A
TYPE-C Cable Output: 5V=3A 9V=2A 10V=2.25A 12V=1.5A Total Output: 5V=3A

10000 mAh

FAST CHARGING



POWER BANK 

R1022

BUILT-IN USB-C & LIGHTNING CABLE
FAST CHARGING LED DIGITAL DISPLAY
POWER BANK

Battery Capacity: 10000mAh (38.5Wh)
TYPE-C Input: 5V=3A 9V=2A 12V=1.5A TYPE-C Output: 5V=3A 9V=2.22A 10V=2.25A 12V=1.67A
LIGHTNING Cable Output: 5V=2.4A 9V=2.22A 12V=1.67A USB-A Output: 5V=3A 9V=2A 10V=2.25A 12V=1.5A
TYPE-C Cable Input: 5V=3A 9V=2A 12V=1.5A TYPE-C Cable Output: 5V=3A 9V=2.22A 10V=2.25A 12V=1.67A
Total Output: 5V=3A

20000 mAh

FAST CHARGING



R1023

BUILT-IN USB-C & LIGHTNING CABLE
FAST CHARGING LED DIGITAL DISPLAY
POWER BANK

Battery Capacity: 20000mAh (77Wh)
TYPE-C Input: 5V=3A 9V=2A 12V=1.5A TYPE-C Output: 5V=3A 9V=2.22A 10V=2.25A 12V=1.67A
LIGHTNING Cable Output: 5V=2.4A 9V=2.22A 12V=1.67A USB-A Output: 5V=3A 9V=2A 10V=2.25A 12V=1.5A
TYPE-C Cable Input: 5V=3A 9V=2A 12V=1.5A TYPE-C Cable Output: 5V=3A 9V=2.22A 10V=2.25A 12V=1.67A
Total Output: 5V=3A



20000 mAh

BUILT-IN CABLE


FAST CHARGING

FAST CHARGING LED DISPLAY POWER BANK
WITH INTEGRATED MULTI-FUNCTION CABLE

R1025

Battery Capacity: 20000mAh (77Wh) TYPE-C1 input: 5V=3A 9V=2.22A 12V=1.67A
TYPE-C2 input: 5V=3A 9V=2.22A 12V=1.67A LIGHTNING input: 5V=3A 9V=2.22A 12V=1.67A
USB-A output: 5V=3A 9V=2A 10V=2.25A 12V=1.5A TYPE-C1 Output: 5V=3A 9V=2.22A 12V=1.67A
TYPE-C2 output: 5V=3A 9V=2.22A 12V=1.67A LIGHTNING output: 5V=2A 9V=2.22A 12V=1.67A
TYPE-C1+TYPE-C2+USB-A total output: 5V=3A TYPE-C2+LIGHTNING+USB-A total output: 5V=3A

 POWER BANK

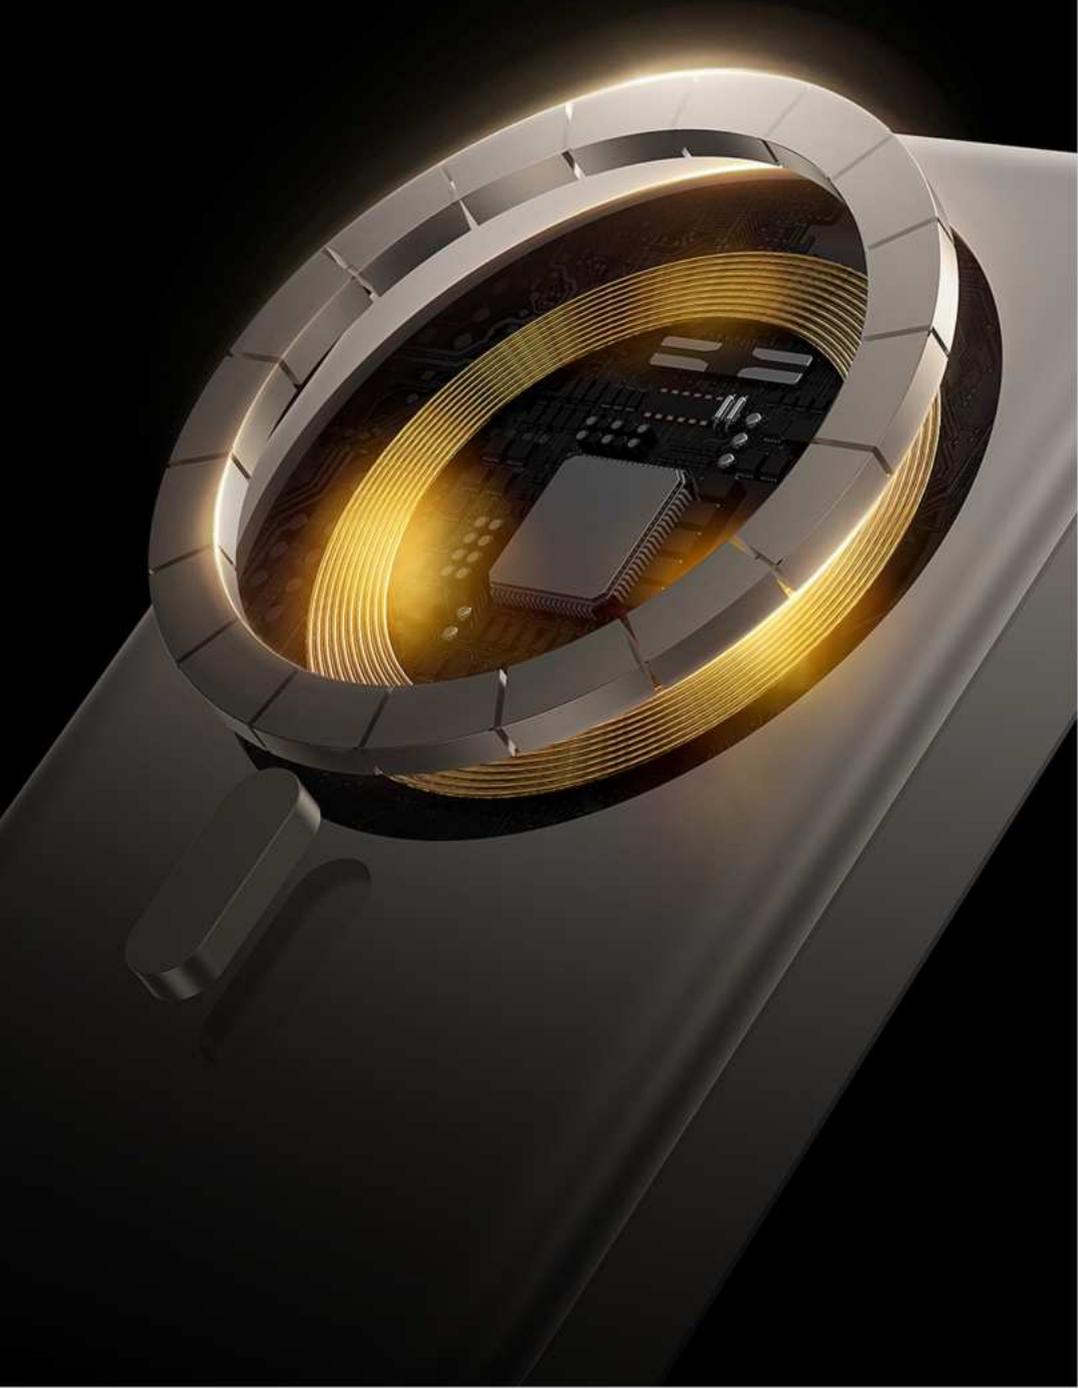

POWER BANK 



10000 mAh

FAST CHARGING

MAGNETIC WIRELESS

**USB-C PORT WITH FAST CHARGING
MAGNETIC WIRELESS CHARGING POWER BANK**

R1024

Battery Capacity: 10000mAh (38.5Wh) TYPE-C Input: 5V=3A 9V=2A
TYPE-C Output: 5V=3A 9V=2.22A 12V=1.67A 20W (Max) Wireless Charging: 5W/7.5W/10W/15W
Total Output: 5V=3A (Max 15W)

 POWER BANK



10000 mAh **FAST CHARGING** **BUILT-IN AC PLUG & CABLE**

BUILT-IN USB-C & LIGHTNING CABLE
AC PLUG FAST CHARGING POWER BANK

R1026

Battery capacity: 10000mAh (37Wh) AC Charging Mode - Input: 110-240V~50/60Hz 0.3A Max
Lightning/Type-c cable output: 5V=2A USB-A output: 5V=2A Type-c output: 5V=2A Total output: 5V=2A
Mobile Power Mode - Input: Type-C:5V=3A 9V=2A 12V=1.5A
Output: Type-C:5V=3A 9V=2.22A 12V=1.67A USB-A:5V=2.4A Lightning Cable Output: 5V=2.4A
Type-C Cable Output:5V=3A 9V=2.22A 10V=2.25A 12V=1.67A Total output: 5V=3A

POWER BANK 



 POWER BANK



POWER BANK 



10000 mAh **FAST CHARGING** **BUILT-IN AC PLUG & CABLE**

BUILT-IN RETRACTABLE USB-C CABLE
AC PLUG FAST CHARGING POWER BANK

R1027

Battery capacity: 10000mAh (38.5Wh) AC Charging Mode - Input: 110-240V~50/60Hz 0.3A Max
Type-C cable output: 5V=3A 9V=2.22A 12V=1.67A USB-A output: 5V=3A 9V=2A 12V=1.5A
Type-c output: 5V=3A 9V=2.22A 12V=1.67A Total output: 5V=3A
Mobile Power Mode - Input: Type-C:5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.5A
Output: Type-C:5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A USB-A:5V=3A 10V=2.25A 9V=2A 12V=1.5A
Type-C Cable Output:5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A Total output: 5V=3A



CHARGER

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES

10W

MULTI-COMPATIBLE
FAST CHARGER



R4202-001 10W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.5A Max Output: USB-A: DC5V=2A 10W Max

10W

MULTI-COMPATIBLE
FAST CHARGER



R4203-001 10W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.5A Max Output: USB-A: DC5V=2A 10W Max

R4202-002 LIGHTNING CHARGER SET

10W

10W USB-A CHARGER - Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=2A 10W Max

LENGTH 100CM 15W

CABLE - USB-A To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 15W



R4203-002 LIGHTNING CHARGER SET

10W

10W USB-A CHARGER - Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=2A 10W Max

LENGTH 100CM 15W

CABLE - USB-A To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 15W



R4202-003 TYPE-C CHARGER SET

10W

10W USB-A CHARGER - Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=2A 10W Max

LENGTH 100CM 18W

CABLE - USB-A To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W



R4203-003 TYPE-C CHARGER SET

10W

10W USB-A CHARGER - Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=2A 10W Max

LENGTH 100CM 18W

CABLE - USB-A To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W



R4202-004 MICRO CHARGER SET

10W

10W USB-A CHARGER - Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=2A 10W Max

LENGTH 100CM 18W

CABLE - USB-A To Micro Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W



R4203-004 MICRO CHARGER SET

10W

10W USB-A CHARGER - Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=2A 10W Max

LENGTH 100CM 18W

CABLE - USB-A To Micro Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W



18W

MULTI-COMPATIBLE
FAST CHARGER



R4211-001
18W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.5A Max Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

18W

MULTI-COMPATIBLE
FAST CHARGER



R4212-001
18W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.5A Max Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

R4211-002
MICRO CHARGER SET



R4211-003
TYPE-C CHARGER SET



R4212-002
MICRO CHARGER SET



R4212-003
TYPE-C CHARGER SET



18W

18W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

18W

18W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

18W

18W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

18W

18W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

LENGTH **100CM** **18W**

CABLE - USB-A To Micro Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W

LENGTH **100CM** **18W**

CABLE - USB-A To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W

LENGTH **100CM** **18W**

CABLE - USB-A To Micro Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W

LENGTH **100CM** **18W**

CABLE - USB-A To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W

18W

MULTI-COMPATIBLE
FAST CHARGER



R4213-001
18W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.5A Max Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

20W

MULTI-COMPATIBLE
FAST CHARGER



R4221-001
20W USB-A FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max Output: USB-A: DC5V=3A 9V=2.22A 10V=2A 20W Max

R4213-002
LIGHTNING FAST CHARGER SET



18W

18W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

R4213-003
TYPE-C FAST CHARGER SET



18W

18W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.5A Max
Output: USB-A: DC5V=3A 9V=2A 12V=1.5A 18W Max

LENGTH **100CM** **18W**

CABLE - USB-A To Micro Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W

LENGTH **100CM** **18W**

CABLE - USB-A To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 18W

20W

20W USB-A CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-A: DC5V=3A 9V=2.22A 10V=2A 20W Max

LENGTH **100CM** **120W**

CABLE - USB-A To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 120W



R4221-002
TYPE-C FAST CHARGER SET

20W

MULTI-COMPATIBLE
FAST CHARGER



R4222-001

20W USB-A FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max Output: USB-A: DC5V=3A 9V=2.22A 10V=2A 20W Max

20W

MULTI-COMPATIBLE
FAST CHARGER



R4223-001

20W USB-A FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max Output: USB-A: DC5V=3A 9V=2.22A 10V=2A 20W Max



20W

20W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max

Output: USB-A: DC5V=3A 9V=2.22A 10V=2A 20W Max

LENGTH 100CM 120W

CABLE - USB-A To Type-C Charging Data Cable

Material: Tin Plated Copper+TPE Power: Max 120W

R4222-002

TYPE-C FAST CHARGER SET



20W

20W USB-A CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max

Output: USB-A: DC5V=3A 9V=2.22A 10V=2A 20W Max

LENGTH 100CM 120W

CABLE - USB-A To Type-C Charging Data Cable

Material: Tin Plated Copper+TPE Power: Max 120W

R4223-002

TYPE-C FAST CHARGER SET

20W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4231-001 20W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.6A Max Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

20W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4232-001 20W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.6A Max Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

GaN

R4231-002 LIGHTNING FAST CHARGER SET



20W

20W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.6A Max
Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4231-003 TYPE-C FAST CHARGER SET



20W

20W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.6A Max
Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4232-002 LIGHTNING FAST CHARGER SET



20W

20W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.6A Max
Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4232-003 TYPE-C FAST CHARGER SET



20W

20W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.6A Max
Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

20W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4233-001 20W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.6A Max Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

20W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
20W ^{MAX}	20W ^{MAX}



R4241-001 20W 1A1C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

GaN

R4233-002 LIGHTNING FAST CHARGER SET



20W

20W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.6A Max
Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4233-003 TYPE-C FAST CHARGER SET



20W

20W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.6A Max
Output: USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4241-002 LIGHTNING FAST CHARGER SET



20W

20W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A
USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4241-003 TYPE-C FAST CHARGER SET



20W

20W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A
USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

20W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
20W ^{MAX}	20W ^{MAX}



R4242-001 20W 1A1C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

20W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
20W ^{MAX}	20W ^{MAX}



R4243-001 20W 1A1C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

GaN

R4242-002 LIGHTNING FAST CHARGER SET



20W

20W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A
USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4242-003 TYPE-C FAST CHARGER SET



20W

20W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A
USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4243-002 LIGHTNING FAST CHARGER SET



20W

20W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A
USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4243-003 TYPE-C FAST CHARGER SET



20W

20W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 0.6A Max
Output: TYPE-C: DC5V=3A 9V=2.22A 12V=1.67A
USB-A: DC5V=3A 9V=2.22A 12V=1.67A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

30W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4251-001 30W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

30W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4252-001 30W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

GaN

R4251-002 LIGHTNING FAST CHARGER SET



30W

30W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4251-003 TYPE-C FAST CHARGER SET



30W

30W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4252-002 LIGHTNING FAST CHARGER SET



30W

30W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4252-003 TYPE-C FAST CHARGER SET



30W

30W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

30W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4253-001 30W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

30W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4262-001 30W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A / PPS 30W MAX

GaN

R4253-002 LIGHTNING FAST CHARGER SET



30W

30W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4253-003 TYPE-C FAST CHARGER SET



30W

30W USB-C FAST CHARGER
Input: 110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A (30W Max)/PPS

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4262-002 LIGHTNING FAST CHARGER SET



30W

30W USB-C FAST CHARGER - Input:110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A / PPS 30W MAX

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4262-003 TYPE-C FAST CHARGER SET



30W

30W USB-C FAST CHARGER - Input:110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A / PPS 30W MAX

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

30W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4263-001

30W USB-C FAST CHARGER

Input: 110-240VAC 50/60Hz 0.8A Max

Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A / PPS 30W MAX

35W GaN

MULTI-COMPATIBLE
FAST CHARGER



R4271-001

35W 1A1C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.0A Max Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX

USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX

USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max USB-C: DC 5V=3A 9V=2.22A 20W Max

GaN

R4263-002 LIGHTNING FAST CHARGER SET



30W

30W USB-C FAST CHARGER - Input:110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A / PPS 30W MAX

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4263-003 TYPE-C FAST CHARGER SET



30W

30W USB-C FAST CHARGER - Input:110-240VAC 50/60Hz 0.8A Max
Output: USB-C: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A / PPS 30W MAX

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4271-002 LIGHTNING FAST CHARGER SET



35W

35W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.0A Max
Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A /PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max
USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4271-003 TYPE-C FAST CHARGER SET



35W

35W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.0A Max
Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A /PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max
USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

35W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
20W ^{MAX}	35W ^{MAX}



R4272-001 35W 1A1C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.0A Max Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max USB-C: DC 5V=3A 9V=2.22A 20W Max

35W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
20W ^{MAX}	35W ^{MAX}



R4273-001 35W 1A1C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.0A Max Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max USB-C: DC 5V=3A 9V=2.22A 20W Max

GaN

R4272-002 LIGHTNING FAST CHARGER SET



35W

35W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.0A Max
Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max
USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4272-003 TYPE-C FAST CHARGER SET



35W

35W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.0A Max
Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max
USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4273-002 LIGHTNING FAST CHARGER SET



35W

35W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.0A Max
Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max
USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4273-003 TYPE-C FAST CHARGER SET



35W

35W 1A1C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.0A Max
Output: USB-A: DC 5V=3A 9V=2.22A 12V=1.67A 20W MAX
USB-C: DC 5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.75A / PPS 35W MAX
USB-A+USB-C: USB-A: DC 5V=1.5A 7.5W Max
USB-C: DC 5V=3A 9V=2.22A 20W Max

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

40W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-C
40W MAX



R4281-001 40W 2C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.2A Max Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A USB-C2: DC 5V=2A 30W+10W(40W Max)

40W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-C
40W MAX



R4282-001 40W 2C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.2A Max Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A USB-C2: DC 5V=2A 30W+10W(40W Max)

GaN

R4281-002 LIGHTNING FAST CHARGER SET



40W

40W 2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.2A Max
Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A
USB-C2: DC 5V=2A 30W+10W(40W Max)

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4281-003 TYPE-C FAST CHARGER SET



40W

40W 2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.2A Max
Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A
USB-C2: DC 5V=2A 30W+10W(40W Max)

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4282-002 LIGHTNING FAST CHARGER SET



40W

40W 2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.2A Max
Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A
USB-C2: DC 5V=2A 30W+10W(40W Max)

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4282-003 TYPE-C FAST CHARGER SET



40W

40W 2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.2A Max
Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A
USB-C2: DC 5V=2A 30W+10W(40W Max)

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

40W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-C
40W MAX



R4283-001 40W 2C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.2A Max Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A USB-C2: DC 5V=2A 30W+10W(40W Max)

65W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A
36W MAX

USB-C
65W MAX



R4291-001 65W 1A2C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.5A Max Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A; USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A, 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

GaN

R4283-002 LIGHTNING FAST CHARGER SET



40W

40W 2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.2A Max
Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A
USB-C2: DC 5V=2A 30W+10W(40W Max)

LENGTH **100CM 30W**

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4283-003 TYPE-C FAST CHARGER SET



40W

40W 2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.2A Max
Output: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=2A, 20V=2A / PPS 40W Max
USB-C1+USB-C2: USB-C1: DC 5V=2A, 9V=2A, 12V=2A, 15V=2A, 20V=1.5A
USB-C2: DC 5V=2A 30W+10W(40W Max)

LENGTH **100CM 60W**

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4291-002 LIGHTNING FAST CHARGER SET



65W

65W 1A2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.5A Max
Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A;
USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A, 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

LENGTH **100CM 30W**

CABLE - Type-C To Lightning Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4291-003 TYPE-C FAST CHARGER SET



65W

65W 1A2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.5A Max
Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A;
USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A, 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

LENGTH **100CM 60W**

CABLE - Type-C To Type-C Charging Data Cable
Material: Tin Plated Copper+TPE Power: Max 60W

65W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
36W ^{MAX}	65W ^{MAX}



R4292-001 65W 1A2C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.5A Max Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
 USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
 USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A; USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
 USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A, 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

65W GaN

MULTI-COMPATIBLE
FAST CHARGER

USB-A	USB-C
36W ^{MAX}	65W ^{MAX}



R4293-001 65W 1A2C FAST CHARGER

Input: 110-240VAC 50/60Hz 1.5A Max Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
 USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
 USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A; USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
 USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A, 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

GaN

R4292-002 LIGHTNING FAST CHARGER SET



65W

65W 1A2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.5A Max
 Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
 USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
 USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A;
 USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
 USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A,
 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
 Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4292-003 TYPE-C FAST CHARGER SET



65W

65W 1A2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.5A Max
 Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
 USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
 USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A;
 USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
 USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A,
 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
 Material: Tin Plated Copper+TPE Power: Max 60W

GaN

R4293-002 LIGHTNING FAST CHARGER SET



65W

65W 1A2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.5A Max
 Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
 USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
 USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A;
 USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
 USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A,
 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

LENGTH 100CM 30W

CABLE - Type-C To Lightning Charging Data Cable
 Material: Tin Plated Copper+TPE Power: Max 30W

GaN

R4293-003 TYPE-C FAST CHARGER SET




65W

65W 1A2C FAST CHARGER - Input: 110-240VAC 50/60Hz 1.5A Max
 Output: USB-A: DC 5V=3A, 9V=3A, 12V=3A 36W Max
 USB-C1/USB-C2: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A / PPS 65W Max;
 USB-C1+USB-A: USB-C1: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A;
 USB-A: DC 5V=3A, 9V=2.22A, 12V=1.67A 45W+20W(65W Max);
 USB-C1+USB-C2+USB-A: USB-C1: DC 5V=2.22A, 9V=2.22A, 12V=2.22A, 15V=2.22A,
 20V=2.25A; USB-C2+USB-A: DC 5V=3A 45W+15W (60W Max)

LENGTH 100CM 60W

CABLE - Type-C To Type-C Charging Data Cable
 Material: Tin Plated Copper+TPE Power: Max 60W

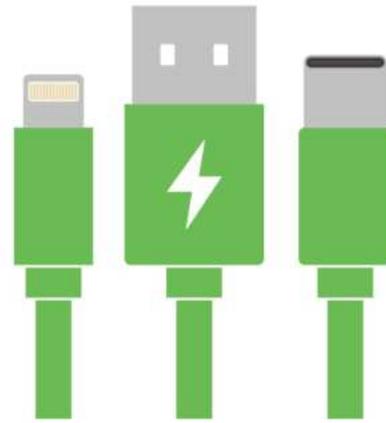

CHARGING CABLES

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES



3A LENGTH **100CM**

R2001

USB-A TO LIGHTNING CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 15W Max Transmission Rate: 480Mbps



3A LENGTH **100CM**

R2003

USB-A TO TYPE-C CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 18W Max Transmission Rate: 480Mbps



2.4A LENGTH **100CM**

R2002

USB-A TO MICRO CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 18W Max Transmission Rate: 480Mbps



3A LENGTH **150CM**

R2004

USB-A TO LIGHTNING CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 15W Max Transmission Rate: 480Mbps



3A LENGTH **150CM**

R2006

USB-A TO TYPE-C CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 18W Max Transmission Rate: 480Mbps



240W LENGTH **150CM**

R2008

TYPE-C TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 240W Max Transmission Rate: 480Mbps



3A LENGTH **100CM**

R2007

USB-A TO LIGHTNING CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 15W Max Transmission Rate: 480Mbps



120W LENGTH **100CM**

R2009

USB-A TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 120W Max Transmission Rate: 480Mbps



120W LENGTH **200CM**

R2010

USB-A TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 120W Max Transmission Rate: 480Mbps



3A LENGTH **200CM**

R2012

USB-A TO TYPE-C CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 18W Max Transmission Rate: 480Mbps



3A LENGTH **200CM**

R2011

USB-A TO LIGHTNING CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 15W Max Transmission Rate: 480Mbps



2.4A LENGTH **200CM**

R2013

USB-A TO MICRO CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 18W Max Transmission Rate: 480Mbps



30W LENGTH **20CM**

R2014

TYPE-C TO LIGHTNING FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 30W Max Transmission Rate: 480Mbps



30W LENGTH **200CM**

R2016

TYPE-C TO LIGHTNING FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 30W Max Transmission Rate: 480Mbps



30W LENGTH **100CM**

R2015

TYPE-C TO LIGHTNING FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 30W Max Transmission Rate: 480Mbps



120W LENGTH **120CM**

R2017

**3IN1 USB-A TO TYPE-C&LIGHTNING&MICRO
FAST CHARGING DATA CABLE**

Material: Tin Plated Copper+TPE Power: 120W Max
Transmission Rate: 480Mbps (Type-C cable only)

TYPE-C
120W^{MAX}



2A LENGTH **120CM**

R2018

3IN1 USB-A TO TYPE-C&LIGHTNING&MICRO CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 10W Max



60W LENGTH **100CM**

R2020

TYPE-C TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 60W Max Transmission Rate: 480Mbps



60W LENGTH **20CM**

R2019

TYPE-C TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 60W Max Transmission Rate: 480Mbps



2.4A LENGTH **200CM**

R2021

USB-A TO MICRO CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 18W Max Transmission Rate: 480Mbps



60W LENGTH **150CM**

R2022

TYPE-C TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 60W Max Transmission Rate: 480Mbps



60W LENGTH **120CM**

R2024

**2IN1 TYPE-C TO TYPE-C&LIGHTNING
FAST CHARGING DATA CABLE**

Material: Tin Plated Copper+TPE Power: 60W Max
Transmission Rate: 480Mbps (Type-C cable only)



120W LENGTH **100CM**

R2023

USB-A TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 120W Max Transmission Rate: 480Mbps



30W LENGTH **100CM**

R2025

**NYLON TYPE-C TO LIGHTNING
FAST CHARGING DATA CABLE**

Material: Tin Plated Copper+TPE+Nylon Power: 30W Max Transmission Rate: 480Mbps

60W LENGTH **100CM**



R2026-001

R2026-002

R2026-003

NYLON TYPE-C TO TYPE-C FAST CHARGING DATA CABLE
Material: Tin Plated Copper + TPE + Nylon Power: 60W Max Transmission Rate: 480Mbps

3A LENGTH **100CM**



R2027

USB-A TO LIGHTNING FAST CHARGING DATA CABLE
Material: Tin Plated Copper+TPE+Nylon Power:15W Max Transmission Rate:480Mbps

60W LENGTH **100CM**



R2028

NYLON TYPE-C TO TYPE-C FAST CHARGING DATA CABLE
Material: Tin Plated Copper+TPE+Nylon Power:60W Max Transmission Rate:480Mbps

120W LENGTH **120CM**

60W LENGTH **120CM**



R2029-001



R2029-002



R2029-003



R2030-001



R2030-002



R2030-003

SILICONE USB-A TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+Silicone Power: 120W Max Transmission Rate: 480Mbps

SILICONE TYPE-C TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+Silicone Power: 60W Max Transmission Rate: 480Mbps

30W LENGTH **120CM**



R2031-001

R2031-002

R2031-003

SILICONE TYPE-C TO LIGHTNING FAST CHARGING DATA CABLE

Material: Tin Plated Copper+Silicone Power: 30W Max Transmission Rate: 480Mbps

120W LENGTH **120CM**

DESIGNED FOR XIAOMI



R2032

USB-A TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE Power: 120W Max Transmission Rate: 480Mbps

60W LENGTH **120CM**



R2033

NYLON TYPE-C TO TYPE-C FAST CHARGING DATA CABLE

Material: Tin Plated Copper+TPE+Nylon Power: 60W Max Transmission Rate: 480Mbps



CAR CHARGER

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

FULL RANGE OF 3C DIGITAL ACCESSORIES

2.4A



R4501

2 USB-A IN 1 CAR CHARGER

Input: DC 12V-24V (3A Max) USB-A1/A2 Output: 5V = 2.4A Total Output: 5V = 2.4A

20W

USB-A	TYPE-C
18W ^{MAX}	20W ^{MAX}



R4505

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V (5A Max) USB-A output: 5V = 3A 9V = 2A 12V = 1.5A (18W Max)
USB-C output: 5V = 3A 9V = 2.22A 12V = 1.5A (20W Max) USB-A+USB-C output: Total 20W (Max)

3.6A



R4503

2 USB-A IN 1 CAR CHARGER

Input: DC 12V-24V (3A Max) USB-A1/A2 Output: 5V = 3.6A Total Output: 5V = 3.6A

42.5W

USB-A	TYPE-C
22.5W ^{MAX}	20W ^{MAX}



42.5W



R4504

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V (6A Max) USB-A Output: 5V = 4.5A 9V = 2A 10V = 2.25A 12V = 1.5A (22.5W Max)
USB-C Output: 5V = 2.4A 9V = 2.22A 12V = 1.67A (20W Max) Total Output: 42.5W (Max)

R4506

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V (6A Max) USB-A Output: 5V = 4.5A 9V = 2A 10V = 2.25A 12V = 1.5A (22.5W Max)
USB-C Output: 5V = 2.4A 9V = 2.22A 12V = 1.67A (20W Max) Total Output: 42.5W (Max)

52.5W

USB-A	TYPE-C
22.5W ^{MAX}	30W ^{MAX}



R4507

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V(7A Max) USB-A output: DC5V ≡ 3A 9V ≡ 2A 10V ≡ 2.25A 12V ≡ 1.5A(22.5W Max)
USB-C output: DC5V ≡ 3A 9V ≡ 3A 12V ≡ 2.5A 15V ≡ 2A 20V ≡ 1.5A(30W Max) PPS: 3.3-11V ≡ 3A
USB-A+Type-C output:Total 52.5W(Max)

15W

USB-A	TYPE-C
30W ^{MAX}	35W ^{MAX}



R4519

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V(5A Max) USB-A output: DC5V ≡ 3A 9V ≡ 3A 10V ≡ 2.25A 12V ≡ 2.5A(30W Max)
USB-C output: DC5V ≡ 3A 9V ≡ 3A 12V ≡ 2.92A 15V ≡ 2.33A 20V ≡ 1.75A(35W Max) PPS: 3.3-11V ≡ 3A
USB-A+Type-C output:Total 15W(Max)

52.5W

USB-A	TYPE-C
22.5W ^{MAX}	30W ^{MAX}



R4518

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V(7A Max) Output: USB-A: 5V ≡ 4.5A 9V ≡ 2A 10V ≡ 2.25A 12V ≡ 1.5A(22.5W Max)
USB-C: 5V ≡ 3A 9V ≡ 3A 12V ≡ 2.5A 15V ≡ 2A 20V ≡ 1.5A(30W Max) Total output: 52.5W(Max)

52.5W


USB-A	TYPE-C
22.5W ^{MAX}	30W ^{MAX}



R4520

USB-A & TYPE-C 2 IN 1 CAR CHARGER

Input: DC 12V-24V(7A Max) USB-A output: DC5V ≡ 3A 9V ≡ 2A 10V ≡ 2.25A 12V ≡ 1.5A(22.5W Max)
USB-C output: DC5V ≡ 3A 9V ≡ 3A 12V ≡ 2.5A 15V ≡ 2A 20V ≡ 1.5A(30W Max) PPS: 3.3-11V ≡ 3A
USB-A+Type-C output:Total 52.5W(Max)

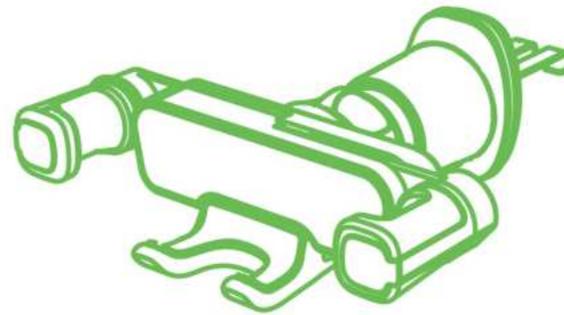

CAR HODLER

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

FULL RANGE OF 3C DIGITAL ACCESSORIES



METAL



GRAVITY LINK
TRIANGULAR STABILITY



360°
SPHERICAL SLIDER
ROTATE FREELY



R4503

METAL GRAVITY CAR HOLDER

Material: Brushed metal patch + ABS + silicone Size: 4.5-6.5 inches for phones Color: Black



MAGNETIC



MAGNETIC DESIGN
AUTO-ADSORPTION



360°
SPHERICAL SLIDER
ROTATE FREELY



R4510

MAGNETIC GRAVITY CAR HOLDER

Material: PC+ABS Size: 4-6 inches for phones Color: Black



BICYCLE / MOTORCYCLE

- GRAVITY LINK
TRIANGULAR STABILITY
- 360°
SPHERICAL SLIDER
ROTATE FREELY



R4513

BICYCLE & MOTORCYCLE PHONE HOLDER

Material: PC + ABS Size: 4-6 inches for phones Color: Black

SUCTION PAD TYPE

- TELESCOPIC BOOM
HEIGHT ADJUSTMENT
- 360°
SPHERICAL SLIDER
ROTATE FREELY



R4511

RETRACTABLE CAR HOLDER

Material: Brushed metal patch + ABS + silicone Size: 4.5-6.5 inches for phones Color: Black

BICYCLE & MOTORCYCLE

- GRAVITY LINK
TRIANGULAR STABILITY
- 360°
SPHERICAL SLIDER
ROTATE FREELY



R4514

BICYCLE & MOTORCYCLE PHONE HOLDER

Material: PC + ABS Size: 4-6 inches for phones Color: Black



MINI

GRAVITY LINK
TRIANGULAR STABILITY



SPHERICAL SLIDER
ROTATE FREELY



R4515

CAR AIR VENT MINI GRAVITY HOLDER

Material: PC + ABS Size: 66-88mm Color: Black



STABLE UPGRADE

SCREWED METAL
HOOK CLAMPS



SPHERICAL SLIDER
ROTATE FREELY




R4516

CAR AIR VENT HOLDER

Material: ABS + Metal Color: Black

RSILOU

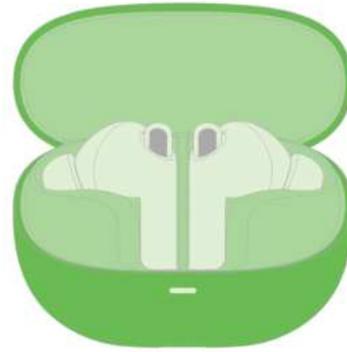

WIRELESS EARPHONE

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES

6.5 HOURS

LONG-LASTING PLAYBACK

13 MM

OVERSIZED DRIVER

POWERED BY STEEL SHELL
LITHIUM-ION BATTERY



R3006

TRUE WIRELESS STEREO EARPHONE

Input: 5V = 200mA Battery Capacity: 35mAh x 2 (earbuds); 250mAh (charging case) Charging Time: Up to 2 hours (charging case)
Playtime: (varies by volume level and content) Up to 6.5 Hours (up to 22 hours with the charging case)
Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32Ω Bluetooth Version: 5.1 Bluetooth Range: 10m / 33ft

POWERED BY STEEL SHELL
LITHIUM-ION BATTERY



13 MM
OVERSIZED DRIVER

7.5 HOURS
LONG-LASTING PLAYBACK



R3007

TRUE WIRELESS STEREO EARPHONE

Input: 5V = 250mA Battery Capacity: 40mAh x 2 (earbuds); 300mAh (charging case) Charging Time: Up to 2 hours (charging case)
Playtime: (varies by volume level and content) Up to 7.5 Hours (up to 26 hours with the charging case)
Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32Ω Bluetooth Version: 5.1 Bluetooth Range: 10m / 33ft

6.5 HOURS

LONG-LASTING PLAYBACK

13 MM

OVERSIZED DRIVER

POWERED BY STEEL SHELL
LITHIUM-ION BATTERY



R3008

TRUE WIRELESS STEREO EARPHONE

Input: 5V = 350mA Battery Capacity: 40mAh x 2 (earbuds); 400mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 6.5 Hours (up to 26 hours with the charging case)
Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

WIRELESS EARPHONE 



 WIRELESS EARPHONE



 POWERED BY STEEL SHELL
LITHIUM-ION BATTERY

13 MM
OVERSIZED DRIVER

8 HOURS
LONG-LASTING PLAYBACK



R3019

TRUE WIRELESS STEREO EARPHONE

Input: 5V = 220mA Battery Capacity: 40mAh x 2 (earbuds); 300mAh (charging case) Charging Time: Up to 2 hours (charging case)
Playtime: (varies by volume level and content) Up to 8 Hours (up to 27 hours with the charging case)

Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

6.5 HOURS

LONG-LASTING PLAYBACK

13 MM

OVERSIZED DRIVER



R3023

TRUE WIRELESS STEREO EARPHONE

Input: 5V \approx 250mA Battery Capacity: 35mAh \times 2 (earbuds); 300mAh (charging case) Charging Time: Up to 2 hours (charging case)
Playtime: (varies by volume level and content) Up to 5.5 Hours (up to 20 hours with the charging case)
Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32 Ω Bluetooth Version: 5.1 Bluetooth Range: 10m / 33ft

8.5 HOURS

LONG-LASTING PLAYBACK

10 MM

OVERSIZED DRIVER



R3025

TRUE WIRELESS STEREO EARPHONE

Input: 5V \approx 350mA Battery Capacity: 45mAh \times 2 (earbuds); 250mAh (charging case) Charging Time: Up to 2 hours (charging case)
Playtime: (varies by volume level and content) Up to 8.5 Hours (up to 20 hours with the charging case)
Driver Unit: 10mm Frequency Response: 20Hz - 20kHz Impedance: 32 Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

5.5 HOURS

LONG-LASTING PLAYBACK

13 MM

OVERSIZED DRIVER



R3024

TRUE WIRELESS STEREO EARPHONE

Input: 5V \approx 350mA Battery Capacity: 35mAh \times 2 (earbuds); 300mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 5.5 Hours (up to 22 hours with the charging case)
Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32 Ω Bluetooth Version: 5.1 Bluetooth Range: 10m / 33ft

6 HOURS

LONG-LASTING PLAYBACK

13 MM

OVERSIZED DRIVER



R3026

TRUE WIRELESS STEREO EARPHONE

Input: 5V \approx 250mA Battery Capacity: 35mAh \times 2 (earbuds); 300mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 6 Hours (up to 24 hours with the charging case)
Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 32 Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

7.5 HOURS

LONG-LASTING PLAYBACK

GAME/MUSIC

DUAL MODEL

14.2MM

OVERSIZED DRIVER



R3009

OWS OPEN-EAR HEADPHONES

Input: 5V = 500mA Battery Capacity: 50mAh x 2 (earbuds); 400mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 7.5 Hours (up to 26 hours with the charging case)
Driver Unit: 14.2mm Frequency Response: 20Hz - 20kHz Impedance: 32Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

5 HOURS

LONG-LASTING PLAYBACK

GAME/MUSIC

DUAL MODEL

12MM

OVERSIZED DRIVER



R3010

OWS OPEN-EAR HEADPHONES

Input: 5V = 200mA Battery Capacity: 40mAh x 2 (earbuds); 230mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 5 Hours (up to 13 hours with the charging case)
Driver Unit: 12mm Frequency Response: 20Hz - 20kHz Impedance: 16Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

5 HOURS

LONG-LASTING PLAYBACK

GAME/MUSIC

DUAL MODEL

13MM

OVERSIZED DRIVER

16.2 MM

OVERSIZED DRIVER

8 HOURS

LONG-LASTING PLAYBACK



R3011

OWS OPEN-EAR HEADPHONES



Input: 5V = 300mA Battery Capacity: 40mAh x 2 (earbuds);300mAh (charging case) Charging Time: Up to 2 hours
 Playtime: (varies by volume level and content) Up to 5 Hours (up to 17 hours with the charging case)
 Driver Unit: 13mm Frequency Response: 20Hz - 20kHz Impedance: 16Ω Bluetooth Version: 5.4 Bluetooth Range: 10m / 33ft



R3018

OWS OPEN-EAR HEADPHONES



Input: 5V = 350mA Battery Capacity: 50mAh x 2 (earbuds);400mAh (charging case) Charging Time: Up to 2 hours (charging case)
 Playtime: (varies by volume level and content) Up to 8 Hours (up to 26 hours with the charging case)
 Driver Unit: 16.2mm Frequency Response: 20Hz - 20kHz Impedance: 16Ω Bluetooth Version: 5.3 Bluetooth Range: 10m / 33ft

 WIRELESS EARPHONE



7.5 HOURS
LONG-LASTING PLAYBACK

DUAL MIC ENC
NOISE CANCELLING FOR CALL

16.2 MM
OVERSIZED DRIVER



R3020

OWS OPEN-EAR HEADPHONES



Input: 5V \approx 550mA Battery Capacity: 50mAh \times 2 (earbuds); 520mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 7.5 Hours (up to 33 hours with the charging case)
Driver Unit: 16.2mm Frequency Response: 20Hz - 20kHz Impedance: 16 Ω Bluetooth Version: 5.4 Bluetooth Range: 10m / 33ft



WIRELESS EARPHONE



4.5 HOURS

LONG-LASTING PLAYBACK

GAME/MUSIC

DUAL MODEL

10MM

OVERSIZED DRIVER



R3021

OWS OPEN-EAR HEADPHONES

Input: 3.7V \approx 300mA Battery Capacity: 40mAh \times 2 (earbuds); 250mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 4.5 Hours (up to 16 hours with the charging case)
Driver Unit: 10mm Frequency Response: 20Hz - 20kHz Impedance: 16 Ω Bluetooth Version: 5.4 Bluetooth Range: 10m / 33ft

7.5 HOURS

LONG-LASTING PLAYBACK

14.2 MM

OVERSIZED DRIVER

DUAL MIC ENC

NOISE CANCELLING FOR CALL

GAME/MUSIC

DUAL MODEL



R3022

OWS OPEN-EAR HEADPHONES

Input: 5V \approx 350mA Battery Capacity: 50mAh \times 2 (earbuds);400mAh (charging case) Charging Time: Up to 2 hours
Playtime: (varies by volume level and content) Up to 7.5 Hours (up to 24 hours with the charging case)
Driver Unit: 14.2mm Frequency Response: 20Hz - 20kHz Impedance: 32 Ω Bluetooth Version: 5.4 Bluetooth Range: 10m / 33ft

40 HOURS

LONG-LASTING PLAYBACK



R3013

NECK-MOUNTED WIRELESS BLUETOOTH HEADSET

Product Type: Neck-mounted Wireless Bluetooth Headset Control mode: Button operation Bluetooth version: Bluetooth V5.3
Effective distance: 10M Headphone battery capacity: 3.7V/250mAh Headphone playback time: \leq 40 hours (80% volume)
Headphone talk time: \leq 40 hours (80% volume) Headphone charging time: \leq 2 hours Headphone charging standard: TYPE-C DC5V \approx 1000mA
Headphone standby time: \geq 250H Speaker size: ϕ 14.2mm, 32 Ω Headphone language: English
Incoming call: broadcast number when incoming call Support Bluetooth protocol: A2DP,AVRCP,HSP,HFP,EDR

40 HOURS

LONG-LASTING PLAYBACK



R3017

NECK-MOUNTED WIRELESS BLUETOOTH HEADSET

Control mode: Button operation Bluetooth version: Bluetooth V5.3 Effective distance: 10M Headphone battery capacity: 3.7V/250mAh
Headphone playback time: \leq 40 hours (80% volume) Headphone talk time: \leq 40 hours (80% volume) Headphone charging time: \leq 2 hours
Headphone charging standard: TYPE-C DC 5V \approx 1000mA Headphone standby time: \geq 250H Speaker size: ϕ 13mm, 32 Ω
Headphone language: English Support Bluetooth protocol: A2DP,AVRCP,HSP,HFP,SP

40 HOURS

LONG-LASTING PLAYBACK



ONE-KEY SWITCH
OF TRIPLE MODE



ONE-KEY SWITCH
OF TRIPLE MODE



MAGNETIC
DESIGN



R3012

NECK-MOUNTED WIRELESS BLUETOOTH HEADSET

Control mode: Button operation Bluetooth version: Bluetooth V5.3 Effective distance: 10M Headphone battery capacity: 3.7V/250mAh
Headphone playback time: ≤40 hours (80% volume) Headphone talk time: ≤40 hours (80% volume)
Headphone charging time: ≤2 hours Headphone charging standard: TYPE-C DC5V=1000mA Headphone standby time: ≥250H
Speaker size: φ10mm, 32Ω Headphone language: English Incoming call: Voice announce call number
Support Bluetooth protocol: A2DP, AVRCP, HSP, HFP, EDR



7 HOURS

LONG-LASTING PLAYBACK



R3014

BONE CONDUCTION WIRELESS HEADSET

Operation mode: Touch operation Speaker size: $\Phi 13\text{mm}/32\Omega$ Charging port: TYPE-C Bluetooth Version: BlueTooth V5.3
Bluetooth Protocol: A2DP, AVRCP, HFP, HSP, SPP Headset battery specifications: 3.7V/90mAh
headset input parameters: 5V=90mA headset charging time: about 2 hours Headset duration: about 7 Hours (70% volume)
Working distance: 10M (no obstacle environment) Operating temperature: $-5^{\circ}\text{C} \sim 65^{\circ}\text{C}$

10 HOURS

LONG-LASTING PLAYBACK



R3015

BONE CONDUCTION WIRELESS HEADSET

Operation mode: Touch operation Speaker size: $\Phi 19.2\text{mm}/8\Omega$ Charging port: TYPE-C Bluetooth Version: BlueTooth V5.3
Bluetooth Protocol: A2DP, AVRCP, HFP, HSP, SPP Headset battery specifications: 3.7V/150mAh
headset input parameters: 5V=130mA headset charging time: about 2 hours Headset duration: about 9.5 Hours (80% volume)
Working distance: 10M (no obstacle environment) Operating temperature: $-5^{\circ}\text{C} \sim 65^{\circ}\text{C}$



WIRED HEADSET

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES

10 MM
OVERSIZED DRIVER

HIGH FIDELITY

DSP COMPATIBLE WITH
MULTIPLE DEVICES



R3501

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±15% Speaker Diameter: Φ 10mm
Sensitivity: 101±3db Maximum Power Input: 5mw Plug: TYPE-C Length of cable: 1.2m±10%
Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

10 MM
OVERSIZED DRIVER

HIGH FIDELITY



R3503

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±15% Speaker Diameter: Φ 10mm
Sensitivity: 101±3db Maximum Power Input: 5mw Plug: TYPE-C
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

10 MM
OVERSIZED DRIVER

HIGH FIDELITY



R3502

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±15% Speaker Diameter: Φ 10mm
Sensitivity: 101±3db Maximum Power Input: 5mw Plug: Φ 3.5mm
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

14.2 MM
OVERSIZED DRIVER

HIGH FIDELITY



R3005

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±10% Speaker Diameter: Φ 14.2mm
Sensitivity: 102±3db Maximum Power Input: 10mw Plug Type: Type-C
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

14.2 MM
OVERSIZED DRIVER



R3506

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±10% Speaker Diameter: Φ 14.2mm
Sensitivity: 102±3dB Maximum Power Input: 10mw Plug Type: Φ 3.5mm
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

14.2 MM
OVERSIZED DRIVER



R3511

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±10% Speaker Diameter: Φ 14.2mm
Sensitivity: 102±3dB Maximum Power Input: 10mw Plug Type: Φ 3.5mm
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

14.2 MM
OVERSIZED DRIVER



R3508

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±10% Speaker Diameter: Φ 14.2mm
Sensitivity: 102±3dB Maximum Power Input: 10mw Plug Type: Type-C
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

14.2 MM
OVERSIZED DRIVER



R3512

WIRED EARPHONES

Frequency Range: 20Hz-20KHz Impedance: 32 Ω ±10% Speaker Diameter: Φ 14.2mm
Sensitivity: 102±3dB Maximum Power Input: 10mw Plug Type: Type-C
Length of cable: 1.2m±10% Microphone Sensitivity: -42db±3db Microphone Size: Φ 4*1.5mm

RSILOU



SOUND FREQUENCY

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES



USB PORT

AUX PORT

TYPE-C PORT

TF PORT



R5501

MINI MULTI-FUNCTIONAL PORTABLE BLUETOOTH SPEAKER

Operation Mode: Button Operation
Charging Port: Type-C
Battery Capacity: 3.7V-2200mAh

Input: 5V \square 0.7A
BT Version: V5.3
Charging Time: 3.5H

Waterproof: IPX4
USB/TF: 64GB max
Battery Life: 7H@100% vol

Battery Life: 24H@80% vol
BT Range: >10M(unobstructed)



LENGTH **90MM**

R5001

LIGHTNING TO 3.5MM AUDIO CABLE

Compatible with Lightning port iPhones and iPads
3.5mm jack headphones: plug-and-play for calls & music



LENGTH **100MM**

R5002

LIGHTNING TO LIGHTNING DUAL-PORT AUDIO & CHARGING CABLE

Compatible with Lightning port iPhones and iPads
Lightning audio port supports cell phone calls and songs
Supports dual ports for cell phone calling, listening and charging at the same time



LENGTH **90MM**

R5005

TO 3.5MM AUDIO CABLE

Compatible with TYPE-C digital audio phones
3.5mm jack headphones: plug-and-play for calls & music



LENGTH **100MM**

R5003

TYPE-C TO 3.5MM+TYPE-C DUAL-PORT AUDIO & CHARGING CABLE

Compatible with TYPE-C digital audio phones
3.5mm earphones support mobile phone calls and music
Supports dual ports for cell phone calling, listening and charging at the same time




LENGTH **100MM**

R5004

TYPE-C TO TYPE-C DUAL-PORT AUDIO & CHARGING CABLE

Compatible with TYPE-C digital audio phones
Type-C audio port supports cell phone calls and songs
Supports dual ports for cell phone calling, listening and charging at the same time

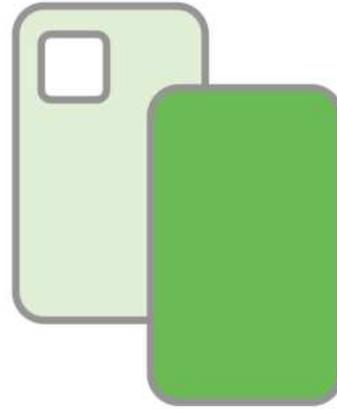

SCREEN PROTECTOR PROTECTIVE CASE

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES



- STUNNING CLARITY 
- ULTRA-SCRATCH-RESISTANT 
- NON-YELLOWING 
- RESERVE HOLE FOR PENDANT 

RPC-FB

TRANSPARENCY NON-YELLOWING SERIES



SILKY SMOOTH MATTE TEXTURE

RESERVE HOLE FOR PENDANT



BUILT-IN SHOCKPROOF AIR PAD

RESPONSIVE METAL BUTTONS



- STUNNING CLARITY 
- ULTRA-SCRATCH-RESISTANT 
- LENS PROTECTION 
- BUILT-IN SHOCKPROOF AIR PAD 
- RESPONSIVE METAL BUTTONS 

RPC-CB

TRANSPARENCY SERIES



RPC-FG

RPC-FG PROTECTOR SERIES



RPC-KZ GUARDIAN SERIES



 STUNNING CLARITY  ULTRA-SCRATCH-RESISTANT  LENS PROTECTION

 BUILT-IN SHOCKPROOF AIR PAD  RESPONSIVE METAL BUTTONS



RPC-KZ GUARDIAN SERIES

 STUNNING CLARITY  ULTRA-SCRATCH-RESISTANT  LENS PROTECTION

 BUILT-IN SHOCKPROOF AIR PAD  RESPONSIVE METAL BUTTONS



RPC-RQ

LUOQI SERIES

LUOQI SERIES **RPC-RQ**



RPC-CQ FAUX LEATHER SERIES



-  QUALITY FAUX LEATHER
-  INNER STRIPE DISSIPATE HEAT
-  ORIGINAL COLOR
-  ANTI-SWEAT ANTI-FINGERPRINT
-  RESERVE HOLE FOR PENDANT



RPC-CQ

FAUX LEATHER SERIES

 LIQUID SILICONE

SOFT MICROFIBER LINING 

 ANTI-SWEAT ANTI-FINGERPRINT

POWERFUL MAGNETIC FORCE 



RPC-CY

LIQUID SILICONE SERIES

RPC-CY LIQUID SILICONE SERIES



RPC-YY BEYOND ORDINARY SERIES





LIQUID SILICONE

ANTI-SWEAT ANTI-FINGERPRINT



SOFT MICROFIBER LINING

METAL EDGES CAMERA PROTECTION



POWERFUL MAGNETIC FORCE

RESPONSIVE METAL BUTTONS



RPC-YY

BEYOND ORDINARY SERIES

RPC-ZD

MAGICSTAND SERIES



RPC-HX

CONVOLUTIONAL SERIES



 ANTI-SWEAT ANTI-FINGERPRINT

 SILKY SMOOTH MATTE TEXTURE

 BUILT-IN SHOCKPROOF AIR PAD

INVISIBLE MAGKICKSTAND 

POWERFUL MAGNETIC FORCE 



RPC-ZD

MAGICSTAND SERIES

 LIQUID SILICONE

 POWERFUL MAGNETIC FORCE

ANTI-SWEAT ANTI-FINGERPRINT 


SILKY SMOOTH MATTE TEXTURE 

BUILT-IN SHOCKPROOF AIR PAD 



CONVOLUTIONAL SERIES

RPC-HX

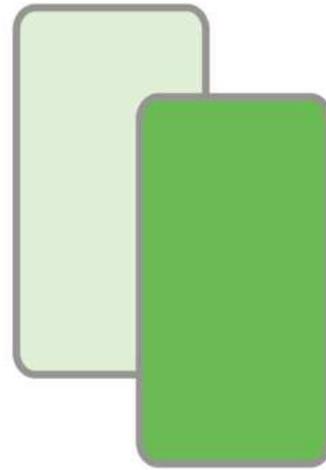

TEMPERED GLASS

POWER BANK
CHARGING CABLES
CHARGER
WIRELESS EARPHONE
WIRED HEADSET
VEHICLE SUPPLIES
PROTECTIVE CASE
SCREEN PROTECTOR

.....
FULL RANGE OF 3C DIGITAL ACCESSORIES

HIGH DEFINITION



R6115
HIGH DEFINITION TEMPERED GLASS

5PCS

033 LEVEL 5A



R6115
DUST-PROOF ANTI-STATIC
HIGH DEFINITION TEMPERED GLASS

3PCS

ANTI-PEEKING



R6223
ANTI-PEEKING TEMPERED GLASS

5PCS

